


UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

1PC TYPE BALL VALVE WITH INTERNAL THREAD
(WCB, CF8, CF8M)

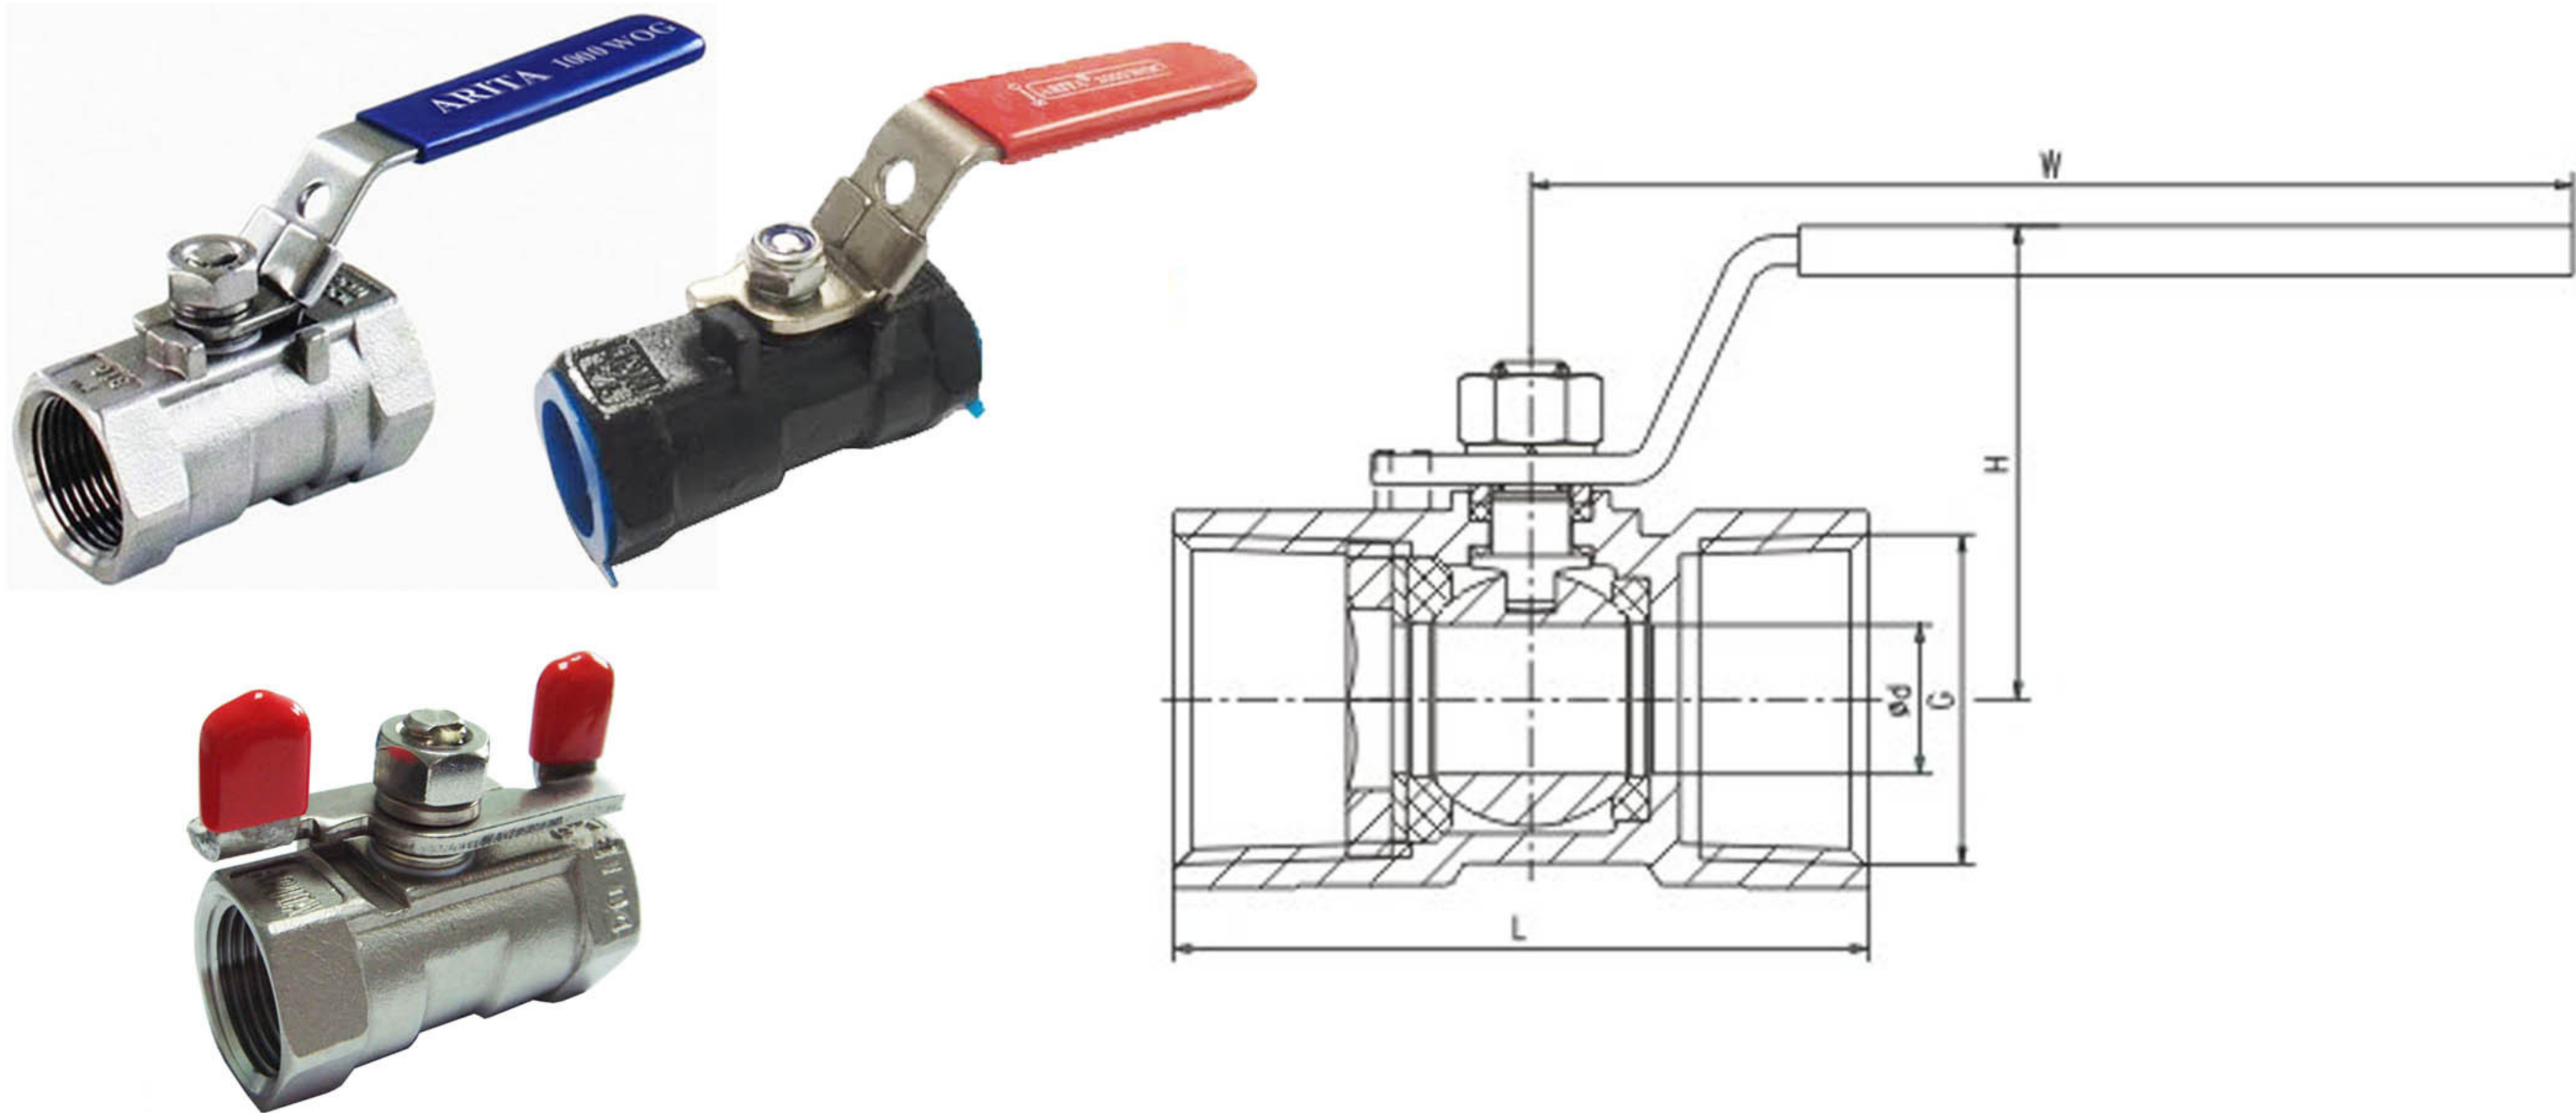

Specifications :
Nominal pressure : PN1.6,2.5,4.0,6.4 MPa
Strength testing pressure : PT2.4,3.8,6.0,9.6 MPa
Seat testing pressure (low pressure) : 0.6 MPa
Applicable Media : Water, Oil, Gas
Applicable temperature : -29~180 deg C

Materials			
Parts	WCB	CF8	CF8M
Body	WCB	CF8	CF8M
Ball	304	304	316
Stem	304	304	316
Seal ring	PTFE	PTFE	PTFE
Packing	PTFE	PTFE	PTFE

Dimension in mm

SIZES		d	L	H	W
DN	G				
8	1/4"	5	40	34	70
10	3/8"	7	45	36	70
15	1/2"	9	55	39	80
20	3/4"	12	60	43	90
25	1"	15	70	46	105
32	1.1/4"	20	80	53	120
40	1.1/2"	25	86	59	130
50	2"	32	101	65	145
65	2.1/2"	38	117	74	170
80	3"	49	140	105	185
100	4"	64	186	115	220

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.