




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

GLOBE VALVE FLANGED END JIS 10K

Model : ARV-802FE(J)

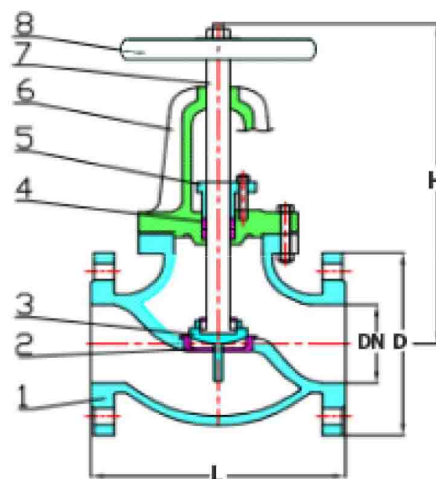

Features :

Face to face is according to JIS B2002
 Flange drilled is according to JIS B2212
 Working Pressure : 10K
 Test Pressure Shell : 21.1 kgf/cm²
 Seat : 15.0 kgf/cm²
 Working Temperature : -10 to 120°C

Technical Data

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SEAT SEAL RING	STAINLESS STEEL
3	DISC	CAST IRON WITH STAINLESS STEEL
4	PACKING	GRAPHITE
5	GLAND	DUCTILE IRON
6	BONNET	CAST IRON
7	STEM	STAINLESS STEEL
8	HANDWHEEL	CAST IRON

Dimension in mm

SIZES	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"	10"	12"
DN	40	50	65	80	100	125	150	200	250	300
L	190	200	220	240	290	330	356	500	620	700
H	260	277	307	353	404	454	533	642	665	755
D	140	155	175	185	210	250	280	330	400	445
Wt. (kg)	15	17	19	30	37	52	79	140	-	-

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARGL1- 11/23