




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

SINGLE DOOR WAFER SWING CHECK VALVE PN16

Model : ARV-803WT(U)

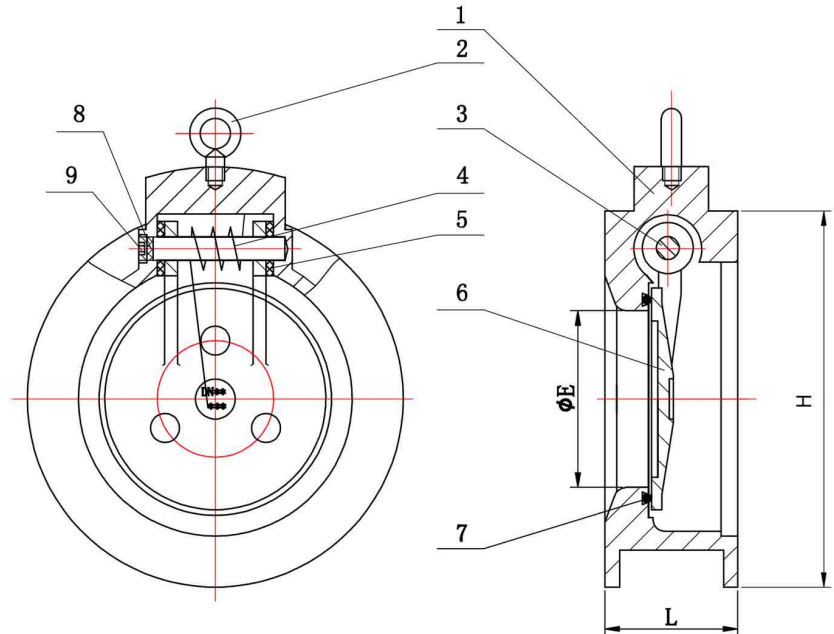

Features :

Working Pressure : 1.6 Mpa

Sealing Pressure Test : 1.76 Mpa

Body Pressure Test : 2.4 Mpa

Testing : API598 DIN3230

Flange Standard : JIS2220 10K/16K, DIN2501 PN10/16,
BS4504 PN10/16, BS10 TABLE D/E,
ANSI 125/150

Medium : Fresh water, Sea water, Waste water, Food stuff,
Steam, All kinds of Oil, Alkaline liquid etc.

Working Temperature : -10 ~ 80 °C

Technical Data

Dimension in mm

SIZES	L	E	H	Wt. (kg)
50	44.5	33	107	1.5
65	47.6	43	127	2
80	50.8	52	142	2.8
100	57.2	74	162	4.1
125	63.5	95	192	6.4
150	69.9	118	218	8.5
200	73	163	273	13.5
250	79.4	194	329	22
300	85.7	238	384	30

Material

No	PART	MATERIAL
1	BODY	CAST IRON GG25
2	RING	WCB (DN125 above only)
3	SHAFT	304
4	SPRING	304
5	GASKET	F4
6	DISC	CF8
7	GASKET RING	NBR
8	GASKET	NBR
9	STUB SCREW	WCB

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARISD- 08/26