




UNIMECH GROUP, MALAYSIA

A MEMBER OF UNIMECH GROUP, MALAYSIA

STAINLESS STEEL SPRING CHECK FOOT VALVE SCREWED END WITH FILTER

Model: ARV-114SE-F1



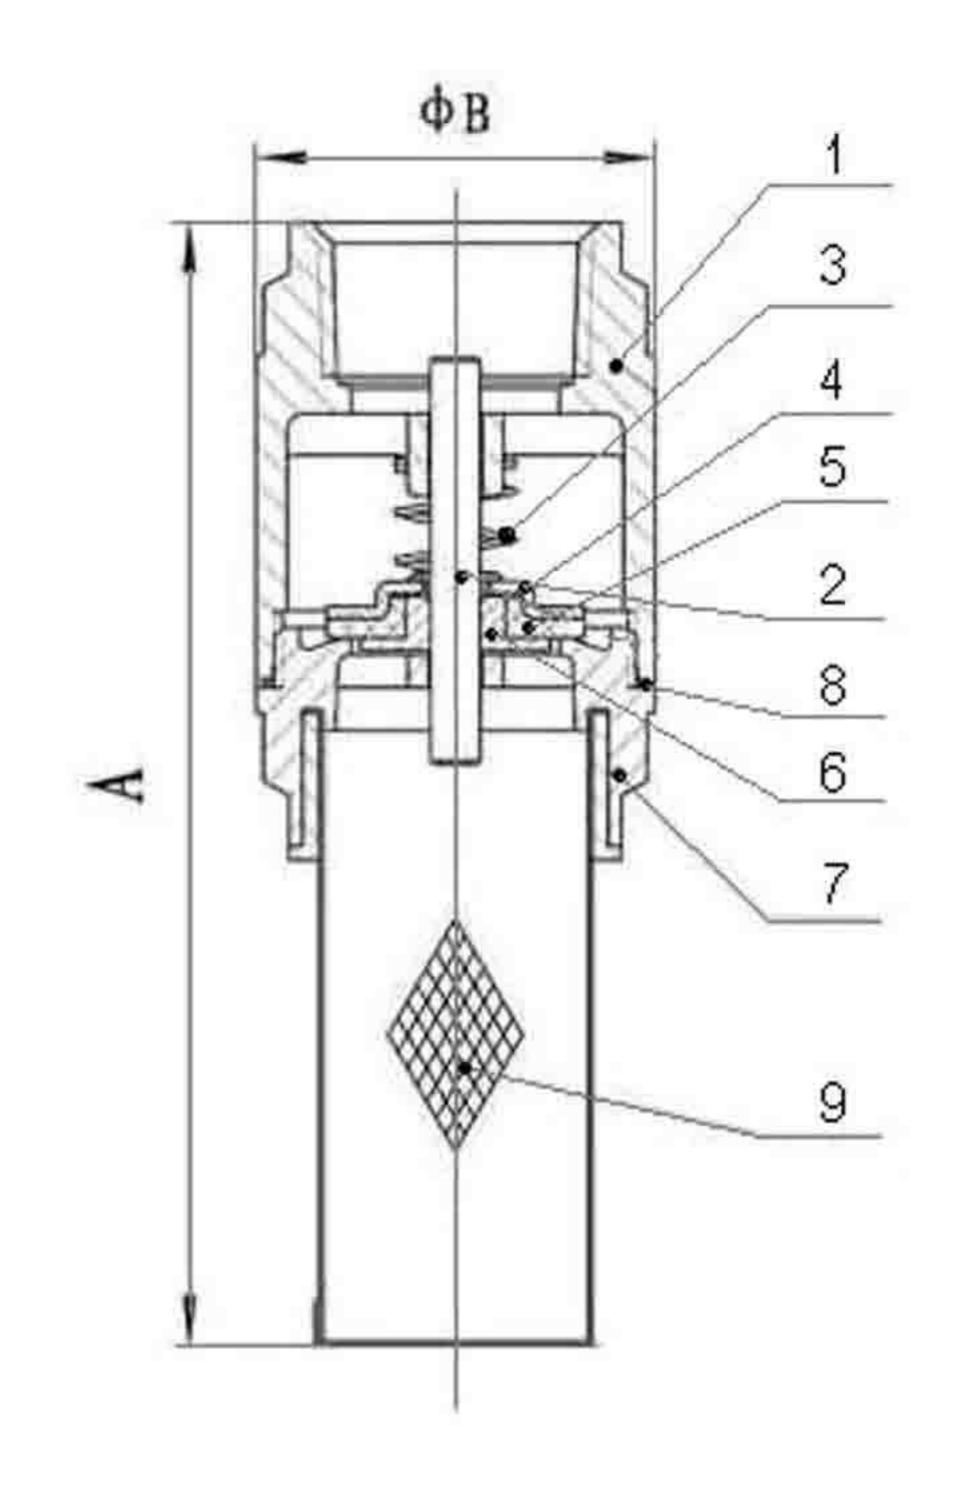

Dimension in mm

SIZES			
DN	in.	Α	ΦВ
10	3/8	91	30
15	1/2	95.5	34.5
20	3/4	113	41.5
25	1	132	48
32	1.1/4	146	60.5
40	1.1/2	166	71
50	2	188	87
65	2.1/2	228	110
80	3	262	125

Technical Data

Material

No.	PART	MATERIAL	
1	BODY	CF8M	
2	STEM	SUS 316	
3	SPRING	SUS 316	
4	PLATE	SUS 316	
5	PACKING	NBR/VITON	
6	DISC	SUS 316	
7	BODY CAP	CF8M	
8	BODY PACKING	PTFE	
9	FILTER	SUS 304	

Features

* Working Pressure: 200 PSI

* Working Temperature : < 120° C

* Suitable Medium : Water, Oil, Gas, etc.

* Investment Casting Body

* Pipe thread in accordance: BSPT

* Body Material: SUS316 / ASTM A351Gr-CF8M / DIN 1.4408

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : CHB316-