




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

GLOBE VALVE FLANGED END 150 LBS

Model : ARV-802FE(A)

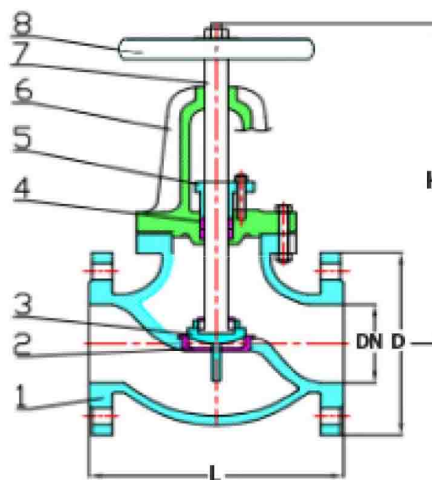

Features :

Face to face is according to ANSI B16.10

Flange drilled is according to ANSI B16.1

Working Pressure : 150 PSI

Test Pressure Shell : 21.1 kgf/cm²

Seat : 15.0 kgf/cm²

Working Temperature : -10 to 120°C

Technical Data

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SEAT SEAL RING	STAINLESS STEEL
3	DISC	CAST IRON WITH STAINLESS STEEL
4	PACKING	GRAPHITE
5	GLAND	DUCTILE IRON
6	BONNET	CAST IRON
7	STEM	STAINLESS STEEL
8	HANDWHEEL	CAST IRON

Dimension in mm

SIZES	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"	10"	12"
DN	40	50	65	80	100	125	150	200	250	300
L	190	203	216	241	292	330	356	495	620	700
H	260	277	307	353	404	454	533	642	665	755
D	140	152	178	190.5	229	254	279	343	406	483
Wt. (kg)	15	17	19	30	37	52	79	140	-	-

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARGL2- 11/23