


BALL FLOAT STEAM TRAP FLANGED END PN 40

Model : FT43-40C

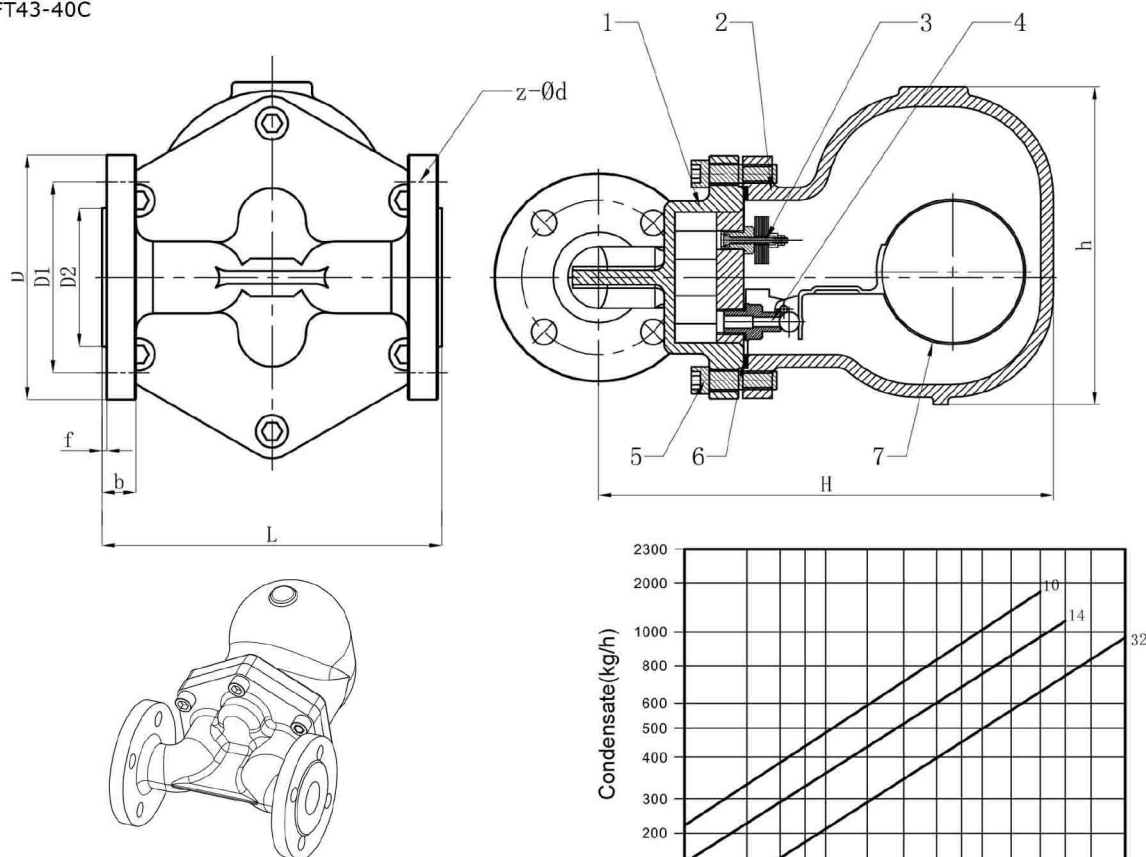

Design & Manufacture conforms to EN26948, GB/T22654

Face to face conforms to EN26554, GB/T 12250

Flange conforms to GB/T 9113

Test conforms to EN27841, GB/T12251

Body Design	PN 40
PMA Maximum allowable Pressure	3.8 Mpa (38bar)
TMA Maximum allowable Temperature	300°C
Maximum Differential Pressure (ΔPMX)	3.2 Mpa (32bar)

Dimension in mm

DN	L	H	h	D	D1	D2	f	b	z-Ød	Weight (kg)
15	150	248	175	95	65	45	2	16	4 ~ Ø14	8.7
20	150	248	175	105	75	58	2	18	4 ~ Ø14	9.5
25	160	248	175	115	85	68	2	18	4 ~ Ø14	10

Material

Technical Data

No	PART	MATERIAL
1	BODY	A216 WCB
2	COVER	A216 WCB
3	AIR VENT ASSEMBLY	A276 420 / TB102/85
4	SEAT	AISI 630
5	BOLT	8.8
6	COVER GASKET	GRAPHITE+304
7	BALL	A240 304




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

BALL FLOAT STEAM TRAP FLANGED END PN 40

Model : FT44-40C

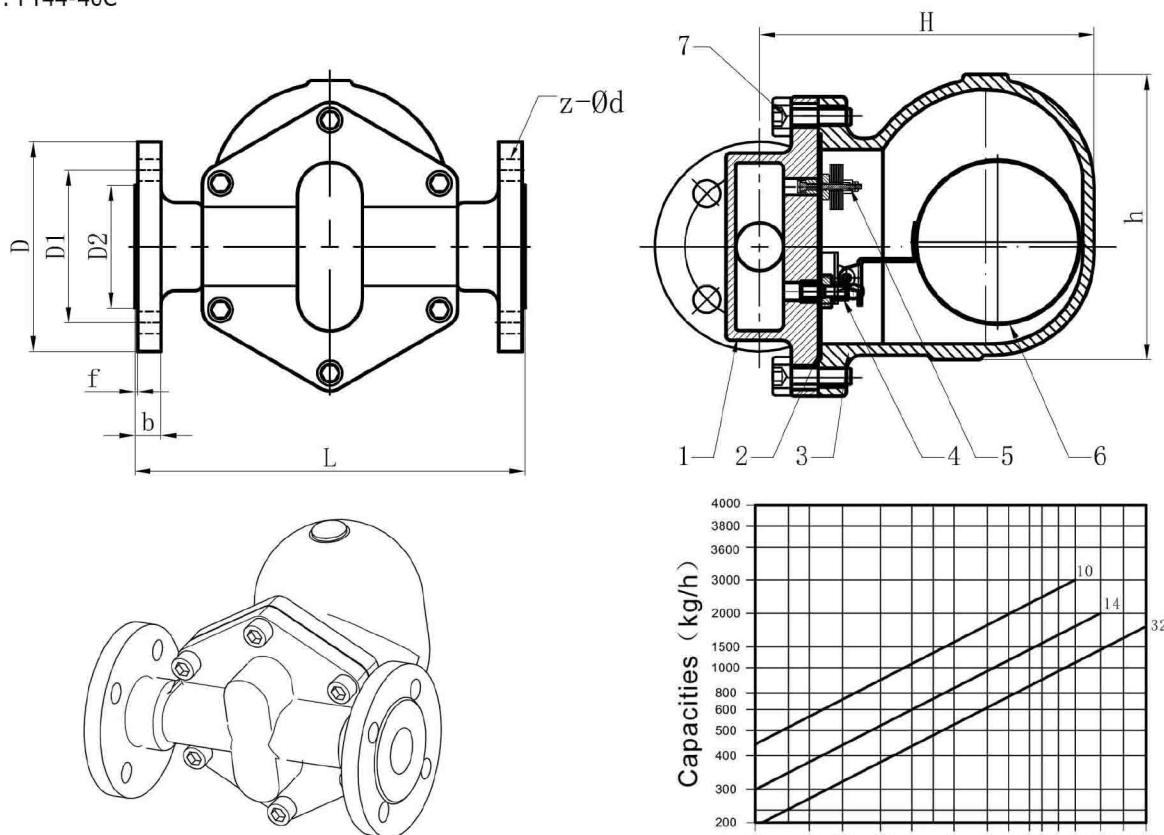

Design & Manufacture conforms to EN26948, GB/T22654
Face to face conforms to EN26554, GB/T 12250
Flange conforms to GB/T 9113
Test conforms to EN27841, GB/T12251

Technical Data

Material

No	PART	MATERIAL
1	BODY	A216 WCB
2	COVER	A216 WCB
3	AIR VENT ASSEMBLY	A276 420 / TB102/85
4	SEAT	AISI 630
5	BOLT	8.8
6	COVER GASKET	GRAPHITE+304
7	BALL	A240 304

Dimension in mm

DN	L	H	h	D	D1	D2	f	b	z-Ød	Weight (kg)
32	270	225	191	140	100	78	2	18	4 ~ Ø18	18
40	270	225	191	150	110	88	3	18	4 ~ Ø18	19
50	270	225	191	165	125	102	3	20	4 ~ Ø18	20.5

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : OTT/CS1- 08/26

2/2