




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

## WAFER TYPE PTFE LINED BUTTERFLY VALVE UNIVERSAL FLANGED

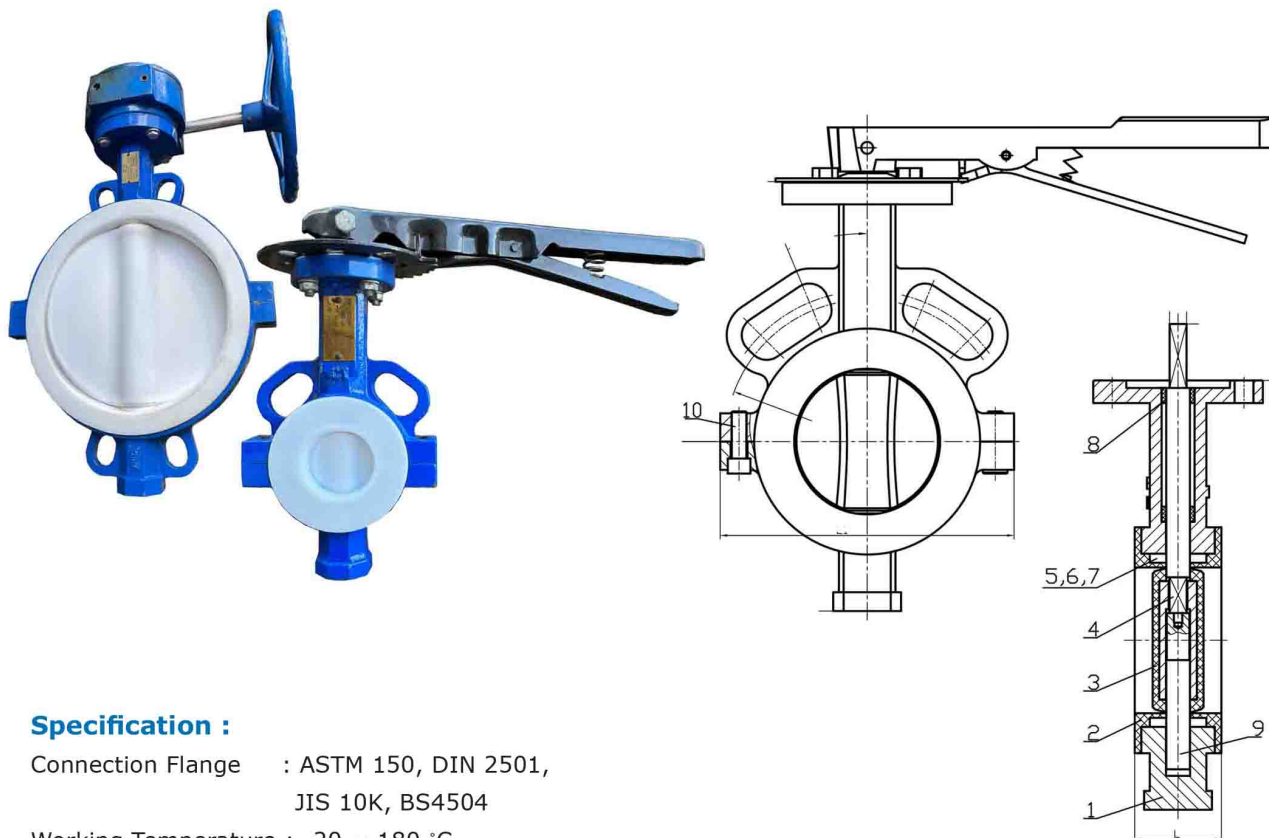

### Specification :

Connection Flange : ASTM 150, DIN 2501,  
JIS 10K, BS4504

Working Temperature : -20 ~ 180 °C

40mm to 125 mm : Lever operated

200mm to 300mm : Gear operated

### Technical Data

#### Dimension in mm

DN	L
40	33
50	43
65	45
80	46
100	52
125	55
150	56
200	60
250	70
300	78

#### Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SEAT	PTFE
3	DISC	CF8 + PTFE
4	STEM	SS 410
5	PRESSING SLEEVE	SS 304
6	PREING PLATE	SR
7	DISC SPRING	60Si 2Mn
8	BUSHING	Polymers
9	STEM	SS 410
10	HEX. SCREW	SS 201

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARCBFL-, ARCBFG- 08/22