




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

LUG TYPE BUTTERFLY VALVE JIS 5K FLANGED

Model : ARV-812LT(J)

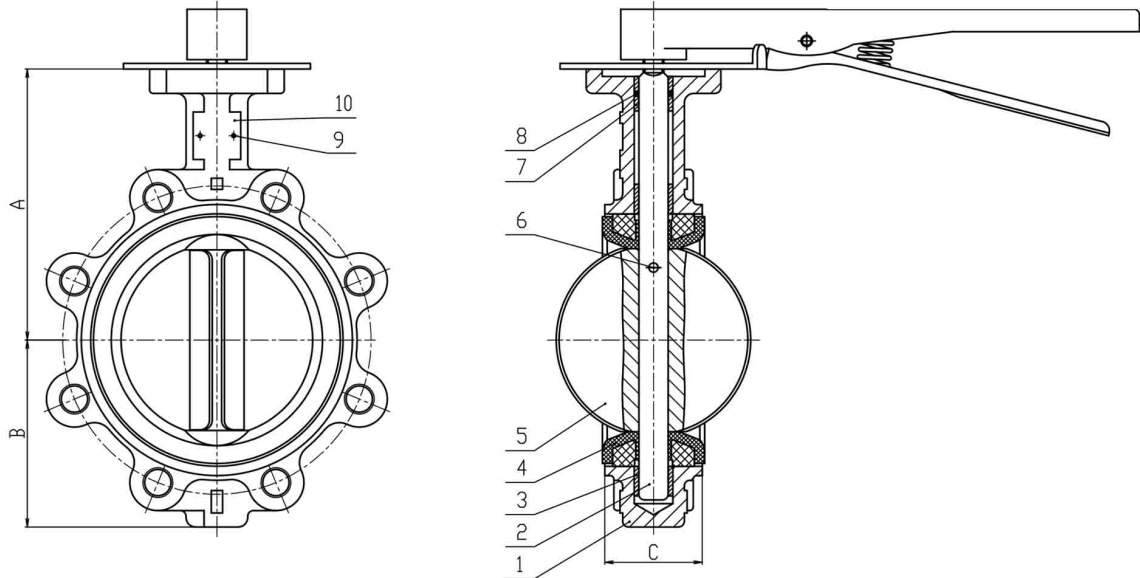

Design Standard

Flange Connection	JIS 5K
-------------------	--------

Hydrostatic Test

Working Pressure	0.5 Mpa
Shell Test Pressure	0.8 Mpa
Seal Test Pressure	0.6 Mpa
Suitable Temperature	-5 to 80 °C (NBR)

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SHAFT	SS 420
3	BUSHING (LONG)	PTFE
4	SEAT	NBR
5	DISC	CF8
6	PIN	SS 316
7	BUSHING (SHORT)	PTFE
8	O-RING	NBR
9	RIVET	ALUMINIUM
10	NAME PLATE	ALUMINIUM
11	HAND LEVER	DI


Dimension in mm

SIZES	DN	A	B	C
2"	50	116	68	42.04
2.1/2"	65	117	75	44.68
3"	80	125	85	45.21
4"	100	140	100	52.07
5"	125	157	117	54.36
6"	150	171	133	55.75
8"	200	206	172	60.58
10"	250	238	200	65.63
12"	300	270	242	76.9

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

LUG TYPE BUTTERFLY VALVE JIS 5K FLANGED

Model : ARV-812LT(J)

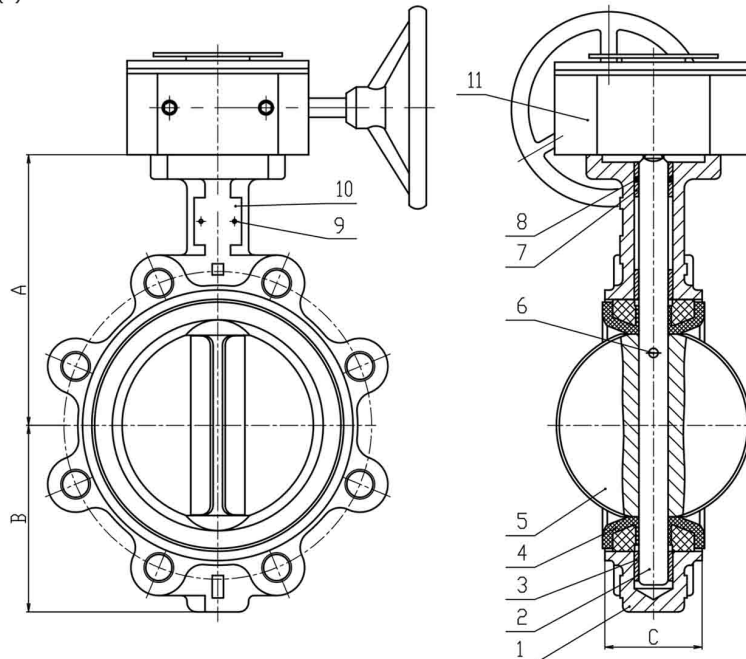

Design Standard

Flange Connection JIS 5K

Hydrostatic Test

Working Pressure	0.5 Mpa
Shell Test Pressure	0.8 Mpa
Seal Test Pressure	0.6 Mpa
Suitable Temperature	-5 to 80 °C (NBR)

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SHAFT	SS 420
3	BUSHING (LONG)	PTFE
4	SEAT	NBR
5	DISC	CF8
6	PIN	SS 316
7	BUSHING (SHORT)	PTFE
8	O-RING	NBR
9	RIVET	ALUMINIUM
10	NAME PLATE	ALUMINIUM
11	GEAR BOX	

Dimension in mm

SIZES	DN	A	B	C
2"	50	116	68	42.04
2.1/2"	65	117	75	44.68
3"	80	125	85	45.21
4"	100	140	100	52.07
5"	125	157	117	54.36
6"	150	171	133	55.75
8"	200	206	172	60.58
10"	250	238	200	65.63
12"	300	270	242	76.9