




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

Y-STRAINER FLANGED END 150 LB

Model : ARV-205FE(A)

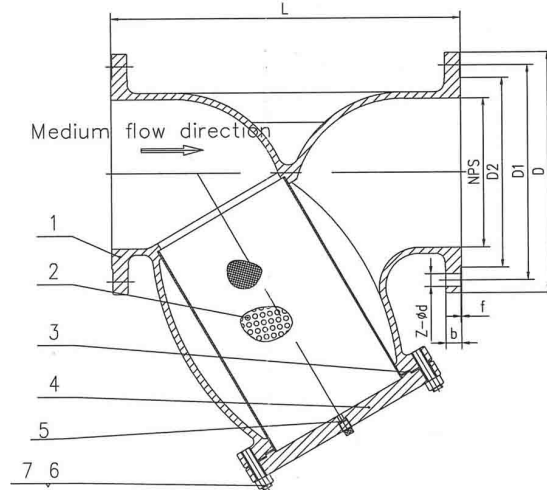

Technical Data

Specification

Nominal Pressure	CL 150
Shell Test Pressure	3.0 Mpa
Working Temperature	-29 ~ 200 °C
Suitable Medium	Water, Steam, Oil

Material

No	PART	MATERIAL
1	BODY	WCB
2	SCREEN	304 MESH
3	GASKET	304 JACKETED GRAPHITE
4	BONNET	WCB
5	PLUG	35
6	NUT	35
7	BOLT	35

Dimension in mm

NPS	DN	L	D	D1	D2	b	f	ZxØd
1/2"	15	130	90	60.3	35	9.6	1.6	4-Ø16
3/4"	20	145	100	69.9	43	10.5	1.6	4-Ø16
1"	25	150	110	79.4	51	11.2	1.6	4-Ø16
1.1/4"	32	180	115	88.9	64	12.8	1.6	4-Ø16
1.1/2"	40	200	125	98.4	73	14.3	1.6	4-Ø16
2"	50	220	150	120.7	92	15.9	1.6	4-Ø19
2.1/2"	65	250	180	139.7	105	17.5	1.6	4-Ø19
3"	80	280	190	152.4	127	19.1	1.6	4-Ø19
4"	100	300	230	190.5	157	23.9	1.6	8-Ø19
5"	125	350	255	215.9	186	23.9	1.6	8-Ø22
6"	150	380	280	241.3	216	25.4	1.6	8-Ø22
8"	200	480	345	298.5	270	28.6	1.6	8-Ø22
10"	250	550	405	362	324	30.2	1.6	12-Ø25.4
12"	300	610	485	431.8	381	31.8	1.6	12-Ø25.4

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARS/CI7- 09/22