




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

Y-STRAINER FLANGED END PN 16

Model : ARV-205FE(D)

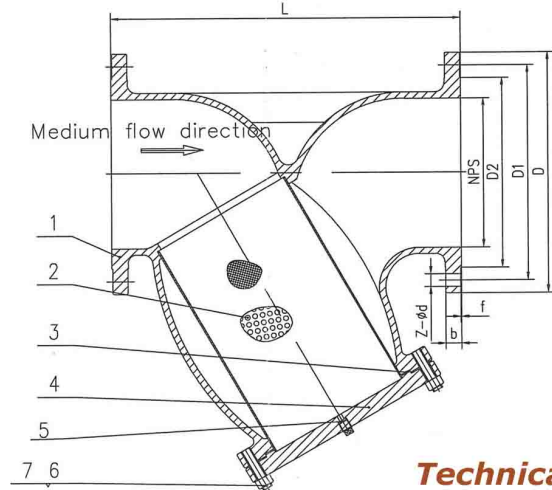

Technical Data

Specification

Nominal Pressure	PN 16
Shell Test Pressure	1.76 Mpa
Working Temperature	-29 ~ 200 °C
Suitable Medium	Water, Steam, Oil

Material

No	PART	MATERIAL
1	BODY	WCB
2	SCREEN	304 MESH
3	GASKET	304 JACKETED GRAPHITE
4	BONNET	WCB
5	PLUG	35
6	NUT	35
7	BOLT	35

Dimension in mm

NPS	DN	L	D	D1	D2	b	f	ZxØd
1/2"	15	130	95	65	45	14	2	4-Ø14
3/4"	20	145	105	75	58	14	2	4-Ø14
1"	25	150	115	85	68	14	2	4-Ø14
1.1/4"	32	180	135	100	78	16	2	4-Ø18
1.1/2"	40	200	145	110	85	16	3	4-Ø18
2"	50	220	160	125	102	16	3	4-Ø18
2.1/2"	65	250	180	145	122	18	3	4-Ø18
3"	80	280	195	160	138	20	3	8-Ø18
4"	100	300	215	180	158	20	3	8-Ø18
5"	125	350	245	210	188	22	3	8-Ø18
6"	150	380	280	240	212	22	3	8-Ø22
8"	200	480	335	295	268	24	3	12-Ø22
10"	250	550	405	355	320	26	3	12-Ø26
12"	300	610	460	410	378	28	3	12-Ø26

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.