




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

## STAINLESS STEEL FLANGE

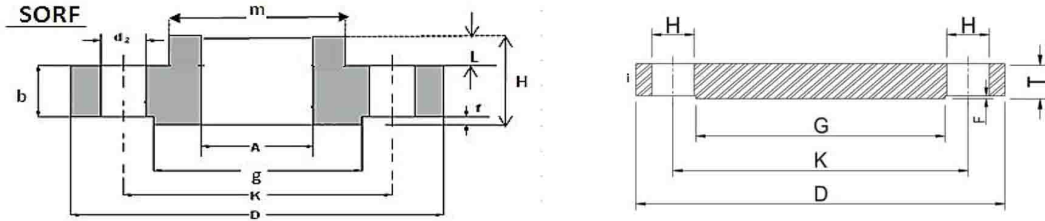

### ANSI 300LBS SORF

SIZE		O.D	I.D	Thickness		Slip On			Raised Face		PCD	Bolt.D	Bolt No.	Weight
DN (mm)	INCH (")	(mm) D	(mm) A	FULL H	FLANGE b	Thk L	OD m	Thk f	OD g	(mm) K	(mm) H			Kg/Pcs
15	½"	95.3	22.3	22.3	12.7	8.0	38.2	1.6	35.0	66.6	15.8	4	0.65	
20	¾"	117.5	27.6	25.5	14.3	9.6	47.7	1.6	42.9	82.5	19.0	4	1.13	
25	1"	123.9	34.5	27.0	15.9	9.5	54.0	1.6	50.9	88.9	19.0	4	1.37	
32	1¼"	133.4	43.1	27.0	17.5	7.9	63.6	1.6	63.6	98.4	19.0	4	1.70	
40	1½"	155.6	49.5	30.2	19.1	9.5	69.9	1.6	73.1	114.3	22.2	4	2.52	
50	2"	165.2	61.9	33.4	20.7	11.1	84.2	1.6	92.1	127.0	19.0	8	2.91	
65	2½"	190.6	74.6	38.2	23.9	12.7	100.0	1.6	104.8	149.2	22.2	8	4.38	
80	3"	209.6	90.6	42.9	27.0	14.3	117.5	1.6	127.1	168.2	22.2	8	5.90	
100	4"	254.1	116.0	47.7	30.2	15.9	146.1	1.6	157.2	200.0	22.2	8	9.72	
125	5"	279.5	143.7	50.9	33.4	15.9	177.9	1.6	185.8	234.9	22.2	8	12.31	
150	6"	317.6	170.6	52.4	34.9	15.9	206.4	1.6	216.0	269.8	22.2	12	15.75	
200	8"	381.1	221.4	61.9	39.7	20.6	260.4	1.6	269.9	330.2	25.4	12	24.41	
250	10"	444.6	276.3	66.7	46.1	19.0	320.7	1.6	323.9	387.3	28.5	16	34.37	
300	12"	520.8	327.1	73.1	49.3	22.2	374.7	1.6	381.1	450.8	31.7	16	50.26	

### ANSI 300LBS RF BLIND

SIZE		O.D	I.D	Thickness		Raised Face		PCD	Bolt.D	Bolt No.	Weight
DN (mm)	INCH (")	(mm) D	(mm) T	FULL i	FLANGE F	Thk G	OD	(mm) K	(mm) H		Kg/Pcs
15	½"	95.3		14.3	12.7	1.6	35.0	66.6	15.8	4	0.65
20	¾"	117.5		15.9	14.3	1.6	42.9	82.5	19.0	4	1.11
25	1"	123.9		17.5	15.9	1.6	50.9	88.9	19.0	4	1.40
32	1¼"	133.4		19.1	17.5	1.6	63.6	98.4	19.0	4	1.81
40	1½"	155.6		20.7	19.1	1.6	73.1	114.3	22.2	4	2.69
50	2"	165.2		22.3	20.7	1.6	92.1	127.0	19.0	8	3.22
65	2½"	190.6		25.5	23.9	1.6	104.8	149.2	22.2	8	4.91
80	3"	209.6		28.6	27.0	1.6	127.1	168.2	22.2	8	6.85
100	4"	254.1		31.8	30.2	1.6	157.2	200.0	22.2	8	11.60
125	5"	279.5		35.0	33.4	1.6	185.8	234.9	22.2	8	15.70
150	6"	317.6		36.5	34.9	1.6	216.0	269.8	22.2	12	21.01
200	8"	381.1		41.3	39.7	1.6	269.9	330.2	25.4	12	34.57
250	10"	444.6		47.7	46.1	1.6	323.9	387.3	28.5	16	53.82
300	12"	520.8		50.9	49.3	1.6	381.1	450.8	31.7	16	79.43

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.