


STAINLESS STEEL FLANGE

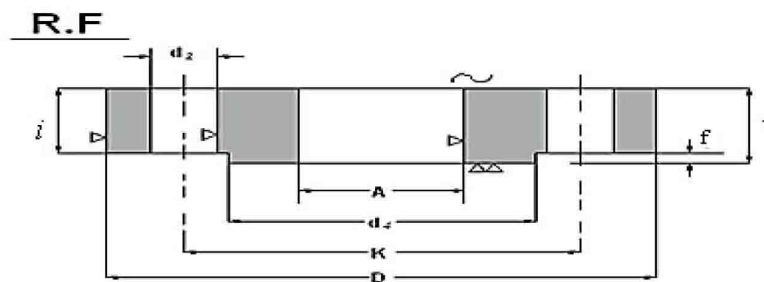

DIN 2501 PN16 RF

SIZE		O.D	I.D	Thickness		Raised Face		K	Bolt.D	Bolt	Weight	Weight
		(mm)	(mm)	FULL	FLANGE	Thk	OD	(mm)	(mm)	No.	Kg/Pc	Kg/Pc
		D	A	T	i	f	d4	K	d2		RF	RF Blind
DN 15	1/2"	95	22.3	14	12	2	45	65	14	4	0.60	0.64
DN 20	3/4"	105	27.7	16	14	2	58	75	14	4	0.85	0.93
DN 25	1"	115	34.5	16	14	2	68	85	14	4	1.02	1.14
DN 32	1 1/4"	140	43.2	16	14	2	78	100	18	4	1.48	1.66
DN 40	1 1/2"	150	49.5	16	13	3	88	110	18	4	1.61	1.85
DN 50	2"	165	62.0	18	15	3	102	125	18	4	2.18	2.60
DN 65	2 1/2"	185	74.7	18	15	3	122	145	18	4	2.72	3.34
DN 80	3"	200	90.7	20	17	3	138	160	18	8	3.28	4.30
DN 100	4"	220	116.1	20	17	3	158	180	18	8	3.62	5.29
DN 125	5"	250	143.8	22	19	3	188	210	18	8	4.89	7.71
DN 150	6"	285	170.7	22	19	3	212	240	22	8	5.97	9.95
DN 200	8"	340	221.5	24	21	3	268	295	22	12	8.33	15.63
DN 250	10"	405	276.3	26	23	3	320	355	26	12	11.83	24.14
DN 300	12"	460	327.1	28	24	4	378	410	26	12	15.25	33.82
DN 350	14"	520	359.1	30	26	4	438	470	26	16	22.62	46.60
DN 400	16"	580	410.5	32	28	4	490	525	30	16	28.42	61.85
DN 450	18"	640	461.8	32	28	4	550	585	30	20	33.17	75.48
DN 500	20"	715	513.1	34	30	4	610	650	33	20	44.77	100.26
DN 600	24"	840	615.9	36	31	5	725	770	36	20	62.26	146.93