




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

SWING CHECK VALVE SCREWED END

Model : ARV-1003SE

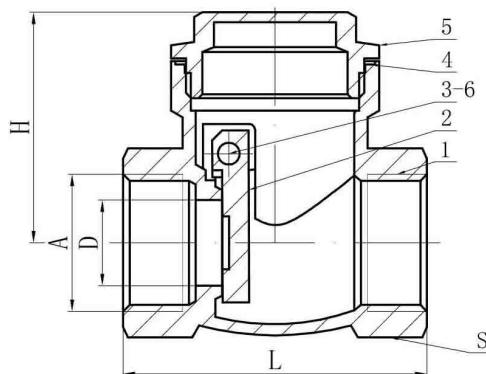

Technical Data

Specification

Nominal Pressure	PN ≤ 1.6 Mpa
Shell Test Pressure	2.4 Mpa
Applicable Temperature	-20~ 110°C
Applicable Media	water, non-corrosive liquid
Screwed End	BSPT

Material

No	PART	MATERIAL
1	BODY	BRASS
2	BAFFLE	BRASS
3	PIN	SS 304
4	SEALING GASKET	TEFLON
5	BONNET	BRASS
6	SCREWS	BRASS

Dimension in mm

Size		D	L	H	S	Weight (kg)
DN	A					
15	Rc1/2"	13	46	35	25.5	0.155
20	Rc3/4"	18	57	36.5	31.5	0.225
25	Rc1"	22	65	47	40	0.385
32	Rc1.1/4"	28	70	49.5	48	0.52
40	Rc1.1/2"	33	76	55	54	0.65
50	Rc2"	41	95	64	66	1.12
65	Rc2.1/2"	50	105	74	83	2.05
80	Rc3"	66	137	85	96	3.1
100	Rc4"	90	177	110	125	5.15

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARBSC- 09/23