




UNIMECH GROUP, MALAYSIA




A MEMBER OF UNIMECH GROUP, MALAYSIA


CARBON STEEL FLANGE

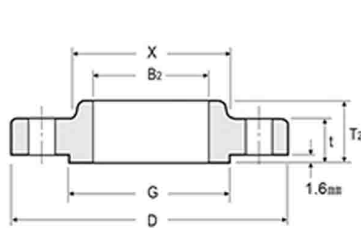


SLIP-ON

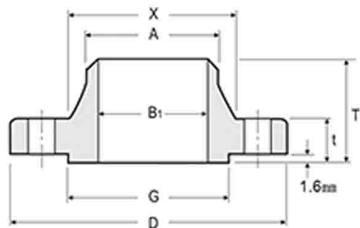

WELDING NECK

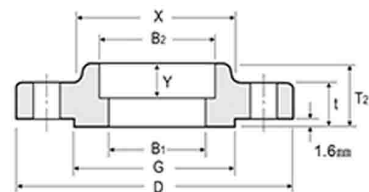

SOCKET WELDING



BLIND

CLASS 300 FLANGES

ANSI B16.5 FORGED FLANGES

Unit:mm

Nominal Pipe Size	Outside Diam.	Diam. at Base of Hub	O.D of Raised Face	Thick- ness	BORE		LENGTH THRU HUB		Diam. of Hub at Bevel	Radius of Fillet	Thread Length	Depth of Socket	DRILLING		
					Welding Neck Socket Welding (SCH80)	Slip-on Socket Welding	Welding Neck	Slip-on Threaded Socket Welding					Bolt Circle Diam	Number of Holes	Diam of Holes
	D	X	G	t	B1	B2	T1	T2	A	R	Q	Y			
1/2	95	38.1	35.1	14.2	14	22.4	52.3	22.4	21.3	3.0	15.7	9.7	66.5	4	15.7
3/4	117	47.8	42.9	15.7	18.5	27.7	57.2	25.4	26.7	3.0	15.7	11.2	82.6	4	19.1
1	124	53.8	50.8	17.5	24.5	34.5	62.0	26.9	33.5	3.0	17.5	12.7	88.9	4	19.1
1 1/4	133	63.5	63.5	19.1	32	43.2	65.0	26.9	42.2	4.8	20.6	14.2	98.6	4	19.1
1 1/2	155	69.9	73.2	20.6	38	49.5	68.3	30.2	48.3	6.4	22.4	15.7	114.3	4	22.4
2	165	84.1	91.9	22.4	49	62.0	69.9	33.3	60.5	7.9	28.4	17.5	127.0	8	19.1
2 1/2	191	100.1	104.6	25.4	61.5	74.7	76.2	38.1	73.2	7.9	31.8	19.1	149.4	8	22.4
3	210	117.3	127.0	28.4	72.5	90.7	79.2	42.9	88.9	9.7	31.8	20.6	168.1	8	22.4
3 1/2	229	133.4	139.7	30.2	-	103.4	81.0	44.5	101.6	9.7	36.6	22.4	184.2	8	22.4
4	254	146.1	157.2	31.8	96.5	116.1	85.9	47.8	114.3	11.2	36.6	23.9	200.2	8	22.4
5	279	177.8	185.7	35.1	119.5	143.8	98.6	50.8	141.2	11.2	42.9	23.9	235.0	8	22.4
6	318	206.2	215.9	36.6	146	170.7	98.6	52.3	168.4	12.7	46.0	26.9	269.7	12	22.4
8	381	260.4	269.7	41.1	194	221.5	111.3	62.0	219.2	12.7	50.8	31.8	330.2	12	25.4
10	445	320.5	323.9	47.8	241	276.4	117.3	66.5	273.1	12.7	55.6	33.3	387.4	16	28.4
12	521	374.7	381.0	50.8	288.5	327.2	130.0	73.2	323.9	12.7	60.5	39.6	450.9	16	31.8
14	584	425.5	412.8	53.8	315.5	359.2	142.7	76.2	355.6	12.7	63.5	41.4	514.4	20	31.8
16	648	482.6	469.9	57.2	362	410.5	146.1	82.6	406.4	12.7	68.3	44.5	571.5	20	35.1
18	711	533.4	533.4	60.5	407	461.8	158.8	88.9	457.2	12.7	69.9	49.3	628.7	24	35.1
20	775	587.2	584.2	63.5	452	513.1	162.1	95.3	508.0	12.7	73.2	54.1	685.8	24	35.1
24	914	701.5	692.2	69.9	546	616.0	168.1	106.4	609.6	12.7	82.6	63.5	812.8	24	41.1

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.